Fowler 2020

AUTO 2020 TOOL CRIB





72-480-070-0

GREAT for Garage and Shop Environments!

Beveled edge with <u>1/64th graduations</u>	• 0.21" thick, 1.59" wide for added rigidity
Hardened steel for wear resistance	Bore is positioned for easy storage
Satin chrome finish on scale for easy and precise readings	Storage sleeve included

Order Number	Description	Straightness
72-480-065-0	6"	0.0015"
72-480-070-0	8"	0.0015"
72-480-075-0	12"	0.0015"
72-480-080-0	24"	0.0025"



- Range: 0 3.25"/0 82.5mm
- Resolution: 0.0005"/0.01mm (fractions in 1/64" increments)
- · Water resistant to IP54 standards
- Floating zero
- Twin conical anvils with the ability to measure low points on both sides of the rotor
- · Includes molded case



Measures most rotors while the wheels are still mounted on the vehicle! (fits most applications)



INCH • METRIC • FRACTION

Order Number 74-150-005-0 Description Rotocal Reach






- Range: 5.5"/140mm
- · Reads in inch, metric, and fractions
- Direct inch/metric/fraction conversion
- Resolution: 0.0005"/0.01mm (fractions in 1/64" increments)
- · Water resistant to IP54 standards
- · Conical anvil for groove measurement
- · 3.5" jaw depth for larger rotors
- Includes molded case

with TWIN CONICAL ANVILS

· Conical anvils measure scored surfaces.



with 6" EXTENDED JAW DEPTH

- 6" jaw depth.
- Includes wooden case




Water & Oil Resistant

Order Number	Description
74-150-006-0	Rotocal Electronic Rotor Gage
74-150-004-0	Rotocal Electronic Rotor Gage with Twin Conical Anvils
74-150-002-0	Rotocal Electronic Rotor Gage with 6" Extended Jaw Depth
74-100-350-0	Replacement battery

1874

Rotocal[®] 74-150-002-0

EZ-Drum Electronic Brake Drum Gage

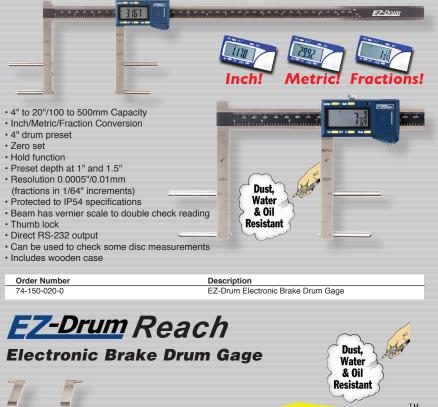

NCH • METRIC • FRACTION NCH • METRIC • FRACTION Measures most heavy-duty drums while the wheels are still mounted on the vehicle (fits most applications) EZ-Drum Reach

- 4"-18.7"/100-475mm capacity (internal measurements)
- Inch/metric/fraction conversion
- The included 4" setting master and 4" drum preset (101.60mm) ensure accurate internal measurements.
- Floating zero sets zero anywhere
- Hold function

6


- Resolution: 0.0005"/0.01mm/fractions in 1/64th" increments
- Accuracy: 0.005"/0.13mm

- Dust, water and oil resistant to IP54 standards
- RS232 output for direct computer connection
- Beam has vernier scale to double check reading
- · Conversion chart on back of main carriage
- Steel conical contact points
- Carriage lock screw
- Includes fitted case

 Order Number
 Description

 74-150-050-0
 EZ-Drum Reach Electronic Brake Drum Gage

12" & 16" DRUM AND ROTOR MEASURING KITS



Drum and Rotor Kit features:

- Measures disc brakes and up to 12"/300mm or 16"/400mm on brake drums
- Includes set of clamps; 4 sets of set screws; 1 Allen wrench; 1 set of 3 3/4" contact points; 1 set of 3/4" cone contact points & 1 set of 3/4" flat contact points in plastic tube



- 16"/400mm Set includes 1 pair of 2" extensions
- When measuring brake drums only, add 8" to measurement—allows for long cone & jaw widths
- · For use with 6" & 8" calipers



Dust, Water and Oil Resistant Caliper features:

- · Dust, water and oil resistant to IP54 specifications
- Range: 6"/150mm
- · Stainless steel frame
- Direct Inch/Metric conversion
- · Accuracy: 0.001"/0.02mm
- Resolution: 0.0005"/0.01mm
- · Large easy to read LCD display
- 4-way measurement, inside, outside, depth and step
- · Includes molded case



Order Number	Description
72-010-777-0	12"/300mm Drum and Rotor Kit
72-010-888-0	16"/400mm Drum and Rotor Kit
with Xtra-Value Cal	
74-101-777-0	12"/300mm Drum and Rotor Kit with 6" Xtra-Value Cal
74-101-888-0	16"/400mm Drum and Rotor Kit with 6" Xtra-Value Cal
With IP54 Caliper	
74-100-775-0	12"/300mm Drum and Rotor Kit with Dust, Water and Oil Resistant Caliper

7



Extended Range Vernier Disc Brake Micrometer

- · Sharp black graduations on satin chrome finish.
- Range: 0.3" 1.7"
- · Graduation: 0.0001"
- Jaw depth: 3.5"
- Ratchet thimble
- · Carbide tipped measuring faces
- · Includes case and measuring standard

Order Number 72-234-402-0

Description Extended Range Vernier Disc Brake Micrometer

Extended Range Digit Disc Brake Micrometers

Fits the most popular range of disc brake sizes!

Inch/Metric

- · Fast, easy-to-read digit counter
- Range: 0.3" 1.7"/10 45mm
- Digital counter reads 0.001"/0.01mm sleeve reads 0.0001"/0.01mm
- Ratchet thimble
- · Carbide tipped measuring faces
- · Includes case and measuring standard

1001

Order Number	Description
72-234-422-0	Extended Range Digit Disc Brake Micrometer
72-234-423-0	Extended Range Digit Disc Brake Micrometer-Metric

Extended Range Digit Disc Brake Micrometer with Twin Conical Anvils

Fits the most popular range of disc brake sizes!

Inch/Metric

- · Fast, easy-to-read digit counter
- Range: 0.3" 1.7"/10 45mm
- Digital counter reads 0.001"/0.01mm sleeve reads 0.0001"/0.01mm
- Ratchet thimble
- · Carbide tipped measuring faces
- · Includes case and measuring standard




Fits the most popular range of disc brake sizes!

Order Number	Description
72-234-522-0	Extended Range Digit Disc Brake Micrometer
72-234-523-0	Extended Range Digit Disc Brake Micrometer-Metric

Vernier Disc Brake Micrometer

- · Sharp black graduations on satin chrome finish
- Range: 0.3" 1.3"
- Graduation: 0.0001"
- Jaw depth: 3.5"
- Ratchet thimble
- · Carbide tipped measuring faces
- · Includes case and measuring standard



Order Number 72-234-202-0 Description Vernier Disc Brake Micrometer

Digit Counter Disc Brake Micrometers

- · Fast, easy-to-read digit counter.
- Digital counter reads 0.001"/0.01mm sleeve reads .0001"/.01mm
- Jaw depth: 3.5"
- Ratchet thimble
- · Carbide tipped measuring faces
- · Includes case and measuring standard



Order Number 72-234-222-0 72-234-223-0

Description

0.3" - 1.3" Digit Counter Disc Brake Micrometer 7 - 32mm Digit Counter Disc Brake Micrometer

Electronic Extended Range Disc Brake Micrometer

 IP54: Water, oil & resistant Jaw depth: 3.5" Friction thimble Carbide tipped measuring faces Auto-shutoff ABS/INC measurement Preset recall Direct Inch/Metric conversion Direct RS-232 output Includes case and measuring standard
Fits the most popular range of disc brake sizes!

Order Number 74-860-434-0 Description Electronic Extended Range Disc Brake Micrometer

Disc and Rotor/Ball Joint Gage





0 1002

Inch ONLY (0 - 1")

- · Checks ball joint wear and disc rotor runout
- Checks tire and wheel runout, gear backlash, valve guide wear, etc.
- Meets state inspection requirements
- Indicator features 0 1" travel, and 0.001" graduation; Inch/Metric 1"/25mm, 0.001"/0.01mm grad.
- · Includes shop-hardened case

Model
Premium Model
Economy Model
Inch/Metric Model

Order Number 72-520-717-0 72-520-757-0 72-520-730-0 72-520-110-0

Disc and Rotor/Ball Joint Gage

Indicator Only

with X-Proof IP54 Shockproof Indicator



Order	Number
72-520)-767-0

Description
Disc and Rotor/Ball Joint Gage with X-Proof Indicator

FLEX CHROME KIT Combo Kit includes both.....

Disc & Rotor/Ball Joint Gage with Chrome Flex Arm



- · Checks ball joint wear and disc rotor runout
- · Checks tire and wheel runout, gear backlash, valve guide wear, etc.
- Corrosion resistant
- · Chrome plated 12" flex arm
- · Meets all state inspection requirements
- · Indicator features 0 1" travel and 0.001" graduation

Order Number 72-520-451-0





AAAAAAA

14 LED Flashlight with Flex Bar Attachment



- 14 LED Ultra-Bright flashlight · Quick release mounting bracket
- · 3 "AAA" batteries included

Everything packed in a convenient, shop-hardened case!

Description Disc and Rotor Flex Chrome Kit

DISC AND ROTOR COMBO KITS **Combo Kit includes both...**



- · Checks ball joint wear and disc rotor runout
- · Checks tire and wheel runout, gear backlash, valve guide wear, etc.
- · Mounted to the vise grip the 12"/300mm flex arm can be set to almost any measuring position desired
- · Indicator features 0 1"/25mm travel, and 0.001"/0.01mm graduations



- · Measures thickness, thickness variation and score depth
- · Carbide tipped anvil faces
- · Includes measuring standard
- · Jaw depth: 3.5"/90mm
- Digit counter graduations: 0.001"/0.01mm
- Vernier graduations: 0.0001"/0.01mm
- Measuring range: 0.300"-1.300"/7-32mm
- · Positive locking nut on spindle

Everything packed in a convenient, shop-hardened case!

Order Number 72-520-222-0 72-520-223-0

Description Inch Disc and Rotor Combo Kit Metric Disc and Rotor Combo Kit

Anyform and Rotor Combo Kit

This kit provides a combination of holding applications. Use the vise grip and flex arm to check ball joint wear, brake and rotor runout. Attach the flex arm to the Anyform base for magnetically mounting on virtually any metallic surface.

Combo Kit includes both...

Disc & Rotor/Ball Joint Gage

Anyform Magnetic Base



• 40 lb. pull

Everything packed in a convenient, shop-hardened case!

Order	Number
72-520)-700-0

Description Anyform and Rotor Combo Kit

Disc Rotor Thickness Gage



Dial Gage is designed to check wearing of disc rotors. Also used to determine deviation in thickness of rotors as well depth of disc-scoring caused by worn brakes.

In compliance with state inspection requirements. Supplied with 1" setting standard.

- Range 0.300 1.300"
- Graduation 0.0005
- Reading 0 50; 50 0
- · Includes conical contact point

Order Number 72-520-727-0 Description Disc Rotor Thickness Gage

AutoCal Electronic Calipers



- Heavy Duty frame for extra rigidity and wear
- · Floating zero
- · Super large, easy to read 14 x 52mm display
- · 4-way measuring
- · Combined thumbrest and thumbroll for fine adjustment
- Includes spare battery and fitted case

Order Number 74-102-006-0 74-102-012-0

Description 6"/150mm AutoCal Electronic Caliper 12"/300mm AutoCal Electronic Caliper

FLIP **PLUS** Electronic Calipers 4 100 110 120 130 140 150 natural and and and and and and and and Fowle The Flip Display allows 74-200-506-0 RIGHT or LEFT handed operation!

 Display flips 180° with display rotation function for true left handed operation

- · Can also be positioned for top viewing
- · Available in 6", 8" and 12" models
- · 4-way measuring OD, ID, depth and step
- Stainless steel frame
- Thumbroll for smooth measuring
- Heavy duty frame is 0.140"/3.5mm thick • Resolution 0.0005"/0.01mm
- Floating zero
- Includes fitted case

.eft-Handed View	,	T
		ł




Dust,

Water

& Oil

Resistant

Order Number	Range	Accuracy
74-200-506-0	0 - 6"/0 - 150mm	0.0012"/0.03mm
74-200-508-0	0 - 8"/0 - 200mm	0.0012"/0.03mm
74-200-512-0	0 - 12"/0 - 300mm	0.0016"/0.04mm

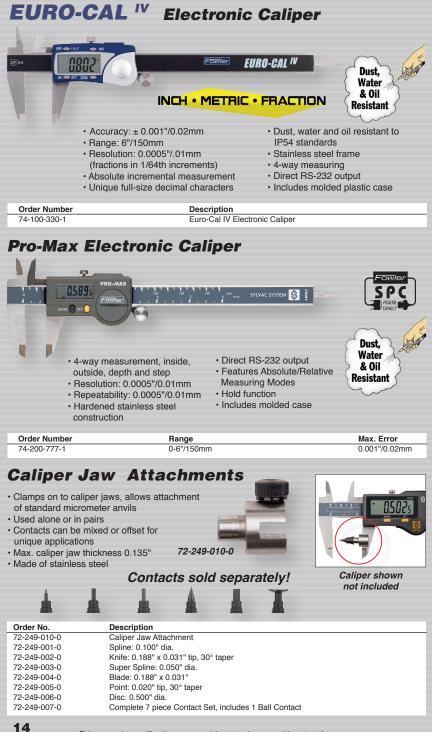


Dust, Water and Oil Resistant Electronic Calipers Dust. Fowler Water & Oil 74-100-777-2 Resistant · Dust, water and oil resistant to IP54 specifications. · 4-way measurement, inside, outside, depth and step · Stainless steel frame. • Resolution: 0.0005"/0.01mm · Includes molded case Large easy to read LCD display Direct RS-232C output Absolute referencing Order Number Range Accuracy 74-100-777-2 0 - 6"/0 - 150mm 0.001"/0.02mm 74-100-712-2 0 - 12"/0 - 300mm 0.0015"/0.04mm **Ultra-Cal V Electronic Caliper** 111 117445 OW PROXIMITY INTERFACE · IP67 rated agains fluids and debris Direct RS-232 output E Features Absolute/Relative Measuring · 4-way measurement, inside, outside, depth and step. (6" & 8" models) Modes Hardened stainless steel construction Thumbroll (6" model only) Order Number Range Accuracy Resolution 74-100-067-1 6"/150mm 0.0008"/20µm 0.0005"/0.01mm **Connectivity Cables** 74-115-526-0 Proximity cable with USB connection 74-115-527-0 Proximity cable with serial connection Value Cal Electronic Calipers owler 74-100-000-2 Stainless steel frame · 4-way measurement, inside, outside, Resolution: 0.0005"/0.01mm depth and step · Large easy to read LCD display · Includes molded case Absolute referencing Accuracy Order Number Range 74-100-000-2 0 - 6"/0 - 150mm 0.001"/0.02mm 0 - 12"/0 - 300mm 74-100-112-2 0.0015"/0.04mm olv-Cal® **Electronic Caliper** Fowler INCH • METRIC • FRACTION · Range: 6"/150mm Polycarbonate frame Absolute/Incremental Measurement Large easy-to-read display 4-way measuring Resolution 0.0005"/0.01mm Accuracy: ± 0.008" (Fractions by 1/64" increments) · Supplied with vinyl pouch Order Number Description

Prices and specifications are subject to change without notice

Poly-Cal Electronic Caliper

74-101-175-0

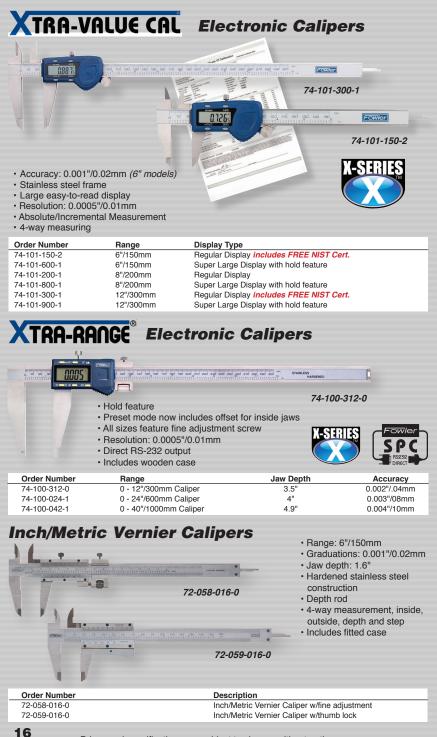



Inch/Metric Reading Dial Calipers



Dial Cal Plus Dial Calipers


Provent and a second seco	Ust, Water & OII Resistant	72-008-050-0	debris • 4-way mea • 0.100" per • Thumbroll f • Carriage lo • Heavy duty frame - 4m	revolution for fine adjustment ck screw stainless steel
Order No.	Description	Accu	racy	Graduation
72-008-050-0	0 - 6" - White-face	± 0.00)1"	0.001"
72-008-051-0	0 - 6" - Black-face	± 0.00)1"	0.001"
72-008-052-0	0 - 150mm - White-face	± 0.03	⊰mm	0.02mm



- 4-way measurement
- Solid stainless steel construction.
- Silky smooth movement throughout
- 0.100" range per revolution
- 0.001" reading dial face
- Tough shockproof design
- · Supplied in shop-hardened case

Order Number	Range	Dial Face Color
72-008-704-0	0 - 4"	White
72-008-714-0	0 - 4"	Black
72-008-706-0	0 - 6"	White
72-008-707-0	0 - 6"	Black
72-008-712-0	0 - 12"	White

T-Bar Depth Base Attachment

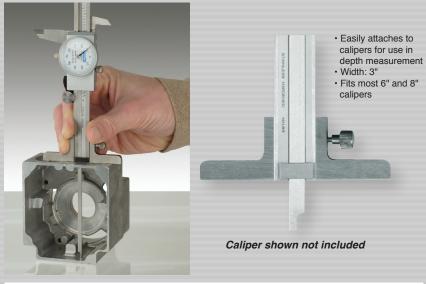

Order Number 72-565-700-0 Description T-Bar Depth Base Attachment

Outside Micrometers



- Sizes over 1" include standard Includes wrench and fitted case

72-229-213-0

Order Number	Description	Accuracy	Range
72-229-201-0	Outside Micrometer	±0.00016"	0 - 1"
72-229-202-0	Outside Micrometer	±0.00016"	1 - 2" w/standard
72-229-203-0	Outside Micrometer	±0.0002"	2 - 3" w/standard
72-229-204-0	Outside Micrometer	±0.0002"	3 - 4" w/standard
72-229-205-0	Outside Micrometer	±0.00024"	4 - 5" w/standard
72-229-206-0	Outside Micrometer	±0.00024"	5 - 6" w/standard
Sets:			
72-229-213-0	Outside Micrometer Set	(See individual units)	0 - 3" w/standards
72-229-214-0	Outside Micrometer Set	(See individual units)	0 - 4" w/standards

Metric Outside Micrometers



· Includes wrench and fitted case

72-229-220-0

Order Number	Description	Accuracy	Range
72-229-209-0	Metric Outside Micrometer	±0.004mm	0 - 25mm
72-229-210-0	Metric Outside Micrometer	±0.004mm	25 - 50mm
72-229-211-0	Metric Outside Micrometer	±0.005mm	50 - 75mm
72-229-212-0	Metric Outside Micrometer	±0.005mm	75 - 100mm
Sets			
72-229-220-0	Metric Outside Micrometer Set	(See individual units)	0 - 100mm w/standards
72-229-215-0	Metric Outside Micrometer Set	(See individual units)	0 - 75mm w/standards

Outside Inch Micrometer



- · Carbide faces on anvil and spindle
- · Graduation: 0.0001"
- · Includes fitted case and wrench

Order Number	Description	Range	
72-235-001-1	Outside Inch Micrometer	0-1"	

Digit Counter Outside Micrometers



- · Digital counter reads 0.001"/0.1mm sleeve reads 0.0001"/0.01mm
- · Carbide tipped measuring faces
- · Insulated frames
- · Spindle thread is hardened, ground and lapped
- · Ratchet stop thimble on all models
- · Positive locking nut on spindle
- Sizes over 1" include standard
- · Includes wrench and fitted case

Order Number	Range	Accuracy
Inch		
72-224-001-0	0 - 1"	±0.00016"
72-224-002-0	1 - 2" w/standard	±0.00016"
72-224-003-0	2 - 3" w/standard	±0.0002"
72-224-004-0	3 - 4" w/standard	±0.0002"
Metric		
72-224-009-0	0 - 25mm	±0.004mm
Sets		
72-224-103-0	0 - 3" w/standard	(See individual units)
72-224-104-0	0 - 4" w/standard	(See individual units)
72-224-220-0	0 - 75mm w/standard	(See individual units)

Individual Micrometer Standards

2"	200	 Measuring faces with microlapped 	with heat insulating covers hardened and precision ground
Inch	_	Metric	
Order Number	Size	Order Number	Size
72-227-001-1	1"	72-227-221-0	25mm
72-227-002-1	2"	72-227-222-0	50mm
72-227-003-1	3"	72-227-223-0	75mm
72-227-004-1	4"	72-227-224-0	100mm

Xtra-Value II Electronic Micrometer




Water Resistant Electronic Micrometer



Electronic Outside Micrometer



Economy Depth Micrometers



- Satin chrome finish
- · Base surface hardened, ground & lapped
- Ratchet thimble
- Locking clamp
- 0.001" Graduation
- · Rod diameter: 0.176"
- · Includes shop-hardened case


Order Number	Range	Graduation	Base
72-225-110-0	0 - 4"	0.001"	2.5"
72-225-112-0	0 - 6"	0.001"	2.5"
72-225-114-0	0 - 4"	0.001"	4"
72-225-116-0	0 - 6"	0.001"	4"

0 - 6" Digit Counter Depth Micrometers



Order Number	Graduations	Base
72-225-176-0	0.001"	2.5"
72-225-226-0	0.001"	4"

0 - 22" Depth Gage

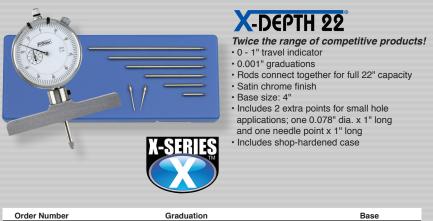

0.001"

4"

22

72-125-006-1

Prices and specifications are subject to change without notice

TRA-VALUE Depth Gage

- Spring-loaded and hold measurement button for ease-of-use
- · Super-large display
- Travel: 0 1"/25mm Range: 0 16"/400mm
- Resolution: 0.0005"/0.01mm (Fractions in 1/64" increments)
- · Supplied in shop-hardened case

INCH • METRIC • FRACTION

Order Number 74-225-555-0

READ Tire Gage

For tire tread thickness measurement! **Reads in inch, metric and fractions!**

- · Spring-loaded and hold measurement button for ease-of-use
- Super-large display
- Range: 1"/25mm
- Resolution: 0.0005"/0.01mm (Fractions in 1/64" increments)
- · Supplied in vinyl holster
- 2.1" base
- 0.095" diameter rod



INCH • METRIC • FRACTION

INCH • METRIC • FRACTION

1001

BFST

SFI I FR

Order Number 74-225-500-0

Description X-Tread Tire Gage

Description

Xtra-Value Depth Gage

-TREAD Tire Tread Gage and Pressure Gage Set

X-Tread Electronic Tread Depth Gage

- Reads in Inch. Metric and Fractions!
- · Spring-loaded and hold measurement button for ease-of-use
- · Super-large display
- Range: 1"/25mm
- Resolution: 0.0005"/0.01mm, (Fractions in 1/64" increments)
- · Supplied in vinyl holster

Electronic Tire Pressure Gage

- · Portable with key ring attachment
- Hold feature
- · Quickly and accurately take pressure readings





Order Number 74-225-525-0

Description Tire Tread Gage & Pressure Gage Set

Toolmaker Universal Measuring Set



- · 6" EZ- Read Steel Rule (Part No. 72-297-006-0 page 52)
- · All contained in a fitted, shop-hardened case

Order Number 72-229-711-0

SELLER!

Description Mechanics Measuring Set

Electronic Caliper & Micrometer Measuring Set



- 6"/150mm Electronic Caliper
- (Part No. 74-100-000-2 see page 15)
- 0-1"/25mm Electronic Micrometer (Part No. 74-870-001-0 see page 21)
- · All contained in a fitted, shop-hardened case

Order Number	
74-004-850-0	

Description

Electronic Caliper & Micrometer Measuring Set

Water Resistant Electronic Measuring Set





- Spring-loaded with a hold measurement button for ease-of-use
- · Super-large display
- Travel: 0 1"/25mm
- · Application range: 0 22"/550mm
- Resolution: 0.0005"/0.01mm (Fractions in 1/64" increments).
- · Supplied in shop-hardened case

Order Number 74-004-330-0



Description Xtra Value Depth Gage and Euro-Cal IV Set

Prices and specifications are subject to change without notice

(Part No. 74-100-330-1 see page 14)

X-PROOF IP54 Electronic Measuring Set · Caliper and Micrometer are protected to IP54 standards

Dust,

· All contained in a fitted, shop-hardened case

6"/150mm Euro-Cal IV



Shockproof Dial Caliper & Depth Attachment Combo with Wooden Case



Shockproof Dial Caliper:

- Tough shockproof design
- 4-way measuring
- Solid stainless steel construction
- Silky-smooth movement throughout
- 0.100" range per revolution
- 0.001" reading dial face

Order Number

72-008-700-0 72-008-710-0 72-100-002-0

Depth Attachment:

- · Attaches quickly
- Positive locking screw
- · Precision-ground contact surface

Packed in a custom-fit wooden case!



Available with

Easy depth measurement!

Description Combo with 6" Whiteface Shockproof Dial Caliper Combo with 6" Blackface Shockproof Dial Caliper Wooden Case Only

XTRA-VALUE CAL & Depth Attachment Combo with Wooden Case



- Range: 6"/150mm
- Large easy-to-read display
- Resolution: 0.0005"/0.01mm
- Direct inch/metric conversion
- · Absolute/incremental measurement
- 4 way measuring

Order Number

74-008-715-0 72-100-002-0

- · Positive locking screw
- · Precision-ground contact surface
- **X-SERIES**



Packed in a custom-fit wooden case!

Description Xtra-Value Caliper & Depth Attachment Combo Wooden Case Only



Fowler Digi-Pro Electronic Protractor

The Digi-Pro electronic protractor includes embedded magnets for unique measurement areas. On/Off, Zero, Hold and Reverse feature to invert the display for easier reading in certain situations.

- Embedded 25 lb. pull magnets
- Full, 360° measuring range
- Accuracy: ± 0.2°
- Repeatability: ± 0.05°
- Resolution: 0.05°
- Invertible display feature
- Uses standard 3V lithium battery
- US Patent 7,726,034



Ideal for fabrication applications!

> USE THE DIGI-PRO TO MAKE FAST AND ACCURATE ANGULAR MEASUREMENTS

Order Number 74-440-740-1 74-440-775-1 Range/Description 4" Digi-Pro Electronic Protractor 12" Digi-Pro Electronic Protractor

XTRA-VALUE Digi-Level

The Xtra Value Digi-Level provides instant 360° digital inclination display of any angle, aluminum housing, with large LCD, reading hold, absolute 0° at sea level.



Order Number 74-422-444-0 Description Xtra-Value Digi-Level

XTRA-VALUE 9" Electronic Level

Fowler's 9" Laser Level provides instant 4 x 90° digital inclination display. With embedded magnets on its measuring surface, a beam splitter projects a 90° laser cross hair for leveling ata-distance. It also includes a 1/4-20 mount for tripod use.

- Measuring range: 4 x 90°
- Resolution: 0.05°
- Accuracy: ± 0.1°
- Repeatability: ± 0.05
 Standard 9 volt battery
- (250 hours life) • Dimensions: 9"L x 1"W x 2-1/4"H
- Includes two-way level and plumb vials
- Reversible reading for inverted use


Order Number 74-440-600-0

Description Xtra-Value 9" Electronic Level

(bar not included)

mini-MAG Protractor

The mini-MAG Protractor provides instant 360° digital inclination display of any angle with the additional unique feature of embedded magnets on both sides and the bottom which make it ideal for a variety of measurements.



Order Number 74-422-450-1 Description Mini-Mag Protractor


Mini-Mag Plus

The Mini-Mag PLUS Protractor features a USB rechargeable battery, a backlit display, Tilt% function and IP54 protection against water, oil, and fluids.

· IP54 protected against debris and fluids USB rechargeable battery with status light (cable included) · 6 month battery life Fowler · Backlit display Tilt % function PLUS Auto off after 5 minutes · Embedded magnets Measuring range: 360° (4 x 90) · Display automatically inverts Resolution: 0.05° Accuracy: ± 0.2° ELECTRONIC PROTRACTOR Repeatability: 0.05° Dust, in54 Hold feature Water · Zero function & Oil Tilt% • Smaller size: 2.12" x 2.12" x 0.9" Resistant · Light weight: 2.7 oz. Order Number Description 74-422-500-0 Mini-Mag Plus

28

Magnetic Bases & Indicators

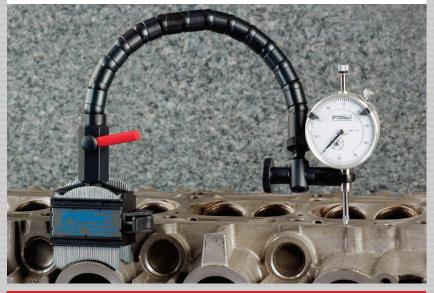

NEW!

CHROME FLEX MAG SET with Anyform Base and X-PROOF Indicator



Flex Arm Anyform Mag Base features:

- · Corrosion resistant chrome plated flex arm
- · Holds rigidly in almost any position.
- 40 lb. pull magnet
- Versatile-70 steel segments work like a contour gage to fit the mag base securely to practically any shape or form

X-Proof IP54 Indicator features: Specifications:

- · Robust, shockproof design
- Travel: 1"
- Reading: 0.001"
- · Continuous reading: 0 100
- Tolerance markers
- AGD Group 2, 2-1/4" dia.
- · Lugback and carbide point

Protection Includes:

- · Rubber bellows on stem
- · O-ring seal on safety cap
- · O-ring protection for bezel
- and rotating dial
- · Sealed back plate

All in a shop-hardened case!

Order Number 72-585-245-0 72-585-255-0 Description Chrome Flex Mag w/Anyform Base and X-Proof Indicator Set Chrome Flex Mag w/Anyform Base and X-Proof Indicator Set Dial Face Color White Black

Dust, Water

& Oil

Resistant

Prices and specifications are subject to change without notice

de la

Magnetic Base & White Face Indicator without Fine Adjust



Magnetic Base (72-585-005-0):

- · Accepts all AGD dial indicators
- Base dimensions: 2" x 2-11/32" x 1-13/16"
- V-base for placing on round surfaces
- · Mounts test indicators with 1/4" posts
- Magnet features 85 lb. pull
- · On-Off lever release magnet

Indicator (72-520-110-0):

- Range: 0-1'
- Graduation: 0.001
- Meets AGD specifications
- Continuous reading 0 100
- Revolution counter
- Tolerance indicators

Order Number 72-585-115-0 72-520-110-0 72-585-005-0

Description Indicator & Base Indicator Only Magnetic Base without fine adjust Only

Magnetic Base & Black Face Indicator with Fine Adjust



Magnetic Base (72-585-010-0):

- · Fine adjustment
- Base dimensions: 2" x 2-11/32" x 1-13/16"
- · Also mounts test indicators with 1/4" post.

0 100/

- 85 lb. pull
- On-Off lever release magnet
- · V-base for placing on round surfaces

Indicator (72-520-109-0):

- Range: 0 1"
- · Graduation: 0.001"
- Meets AGD specifications
- Continuous reading 0 100
- Revolution counter
- Tolerance indicators

Order Number 72-520-199-0 72-520-109-0 72-585-010-0

Description

Indicator & Base Indicator Only Magnetic Base w/ fine adjust Only

Fine Adjust Mag Base Set with Mag Back With INDI-XIIII Electronic Indicator or AGD White face Indicator

Included Magnetic Indicator Back for mounting to most metal surfaces!



AGD Indicator features:

- AGD Group 2
- Dial diameter: 2-1/4"
- Travel: 1"
- Reading: 0.001"
- · Continuous reading: 0 100
- · Carbide tipped point
- Magnetic Indicator Back features:
- Use for positioning the indicator on most
- metal surfaces
- · Protective coating





Indi-X Blue Indicator features:

- Direct Inch/Metric Conversion
- 1"/25mm travel
- 2-1/4" dial face
- · Lugback and 3/8" stem diameter
- Resolution 0.0005"/0.01mm
- Tolerance indicators
- · Absolute/incremental reading
- Floating zero
- · Carbide tipped point

Magnetic Base features:

- 85 lb. pull
- Fine adjustment
- V-bottom base

See the Indi-X Blue on page 37!

All in a shop-hardened case.

Order Number 74-585-075-0 72-585-125-0

Description Fine Adjust Mag Base Set with Indi-X Blue Electronic Indicator Set Fine Adjust Mag Base with AGD White Face Indicator Set

Articulating Mag Base and Indicator Combos



AGD Indicator

- 1" travel
- Continuous reading: 0 100.
- · AGD group 2, 2-1/4" dial diameter
- Revolution counter
- Tolerance markers
- Lug back mount
- Carbide point

Articulating Mag Base:

- · Adjust in almost unlimited ways
- · Fine adjust
- 85 lb. pull
- V-slot on base for mounting on rounded surfaces

201002 cg BEST to SELLER!

Order Number Description

72-585-150-0 Articulating Mag Base & Indicator Combo 72-520-110-0 AGD Indicator only 72-585-008-0 Articulating Mag Base only Indi-X blue FRACTION Electronic Indicator:

- Direct Inch/Metric/Fraction Conversion
- · Auto Off feature
- 2-1/4" dial face
- Lugback and 3/8" stem mountings
- Resolution 0.0005"/0.01mm/64ths
- Tolerance indicators
- · Absolute/incremental reading
- Floating zero
- · Carbide tipped point

Articulating Mag Base:

- · Adjust in almost unlimited ways
- · Fine adjust
- 85 lb. pull
- V-slot on base for mounting on rounded surfaces

	Order Number	Description
	74-585-250-0	Indi-X Blue Fraction Electronic
		Indicator & Articulating Mag Base
1	74-520-260-0	Indi-X Blue Fraction Electronic
		Indicator
1	72-585-008-0	Articulating Mag Base

Sets includes shop-hardened case!

Flex Arm Base & White Face Dial **Indicator Combo**



Flex-Arm Mag Base (72-585-015-0):

- 85 lb. pull
- · Holds rigidly in any position desired
- · V-base for placing on round surfaces
- · On-Off lever release magnet

Indicator (72-520-110-0):

- 1" travel
- AGD aroup 2
- · 2-1/4" dial diameter
- Reading: 0.001"
- · Continuous reading: 0-100
- Revolution counter
- Tolerance indicators

Order Number 72-641-300-0

72-520-110-0 72-585-015-0

Description

Indicator & Base Indicator Only Flex-arm Magnetic Base Only

CHROME FLEX MAG SET

With INDIXING Electronic Indicator or AGD Black face Indicator

Included Magnetic

Indicator Back for

mounting to most

metal surfaces!

Indi-X Blue Indicator features:

- Direct Inch/Metric Conversion
- 1"/25mm travel
- · 2-1/4" dial face
- Lugback and 3/8" stem diameter
- Resolution 0.0005"/0.01mm
- Tolerance indicators
- Absolute/incremental reading
- Floating zero
- · Carbide tipped point

Flex Arm Mag Base features:

- · Corrosion resistant chrome plated flex arm
- · 85 lb. pull magnet
- · Holds rigidly in almost any position. V-base for mounting on rounded
- surfaces

Magnetic Indicator Back features:

- Use for positioning the indicator on most metal surfaces
- · Protective coating

All in a shop-hardened case!

AGD Indicator features:

0 100/

SFLI

- AGD Group 2
- Dial diameter: 2-1/4"
- Travel: 1"

BEST

SELLER!

- · Reading: 0.001" Continuous reading: 0 - 100
- Carbide tipped point

See the Indi-X Blue on page 37!

Order Number	Description
74-585-100-0	Chrome Flex Mag and Indi-X Blue Electronic Indicator Set
72-585-500-0	Chrome Flex Mag and AGD Black Face Indicator Set

X-PROOF[®] Water Resistant Indicator Set



Magnetic Base (72-585-010-0):

- Fine adjustment
- Base dimensions: 2" x 2-11/32" x 1-13/16"
- · Also mounts test indicators with 1/4" post
- 85 lb. pull
- On-Off lever release magnet
- · V-base for placing on round surfaces

X -Proof Indicator (72-520-450-0):

- Travel: 1"
- Reading: 0.001"
- Continuous reading: 0 100
- Tolerance markers
- AGD Group 2, 2-1/4" dia.
- Lugback and carbide point
- · Robust, shockproof design
- · Rubber bellows on stem
- O-ring seal on safety cap
- · O-ring protection for bezel and rotating dial
- · Sealed back plate

Included Magnetic Indicator Back for

mounting to most

X-PROOF

Rubber bellows on stem

O-ring seal on safety cap

and rotating dial

Sealed back plate

O-ring protection for bezel

Dust,

Water

& Oil

Resistant

metal surfaces!

Order Number 72-585-155-0

Description X-Proof Water Resistant Indicator Set

CHROME FLEX MAG SET

With X-PROOF Indicator

Flex Arm Mag Base features:

- · Corrosion resistant chrome plated flex arm
- 85 lb. pull magnet
- · Holds rigidly in almost any position
- V-base for mounting on rounded surfaces

Magnetic Indicator Back features:

- Use for positioning the indicator on most metal surfaces
- · Protective coating

X-Proof IP54 Indicator features: Specifications: Protection Includes:

- Robust, shockproof design
- Travel: 1"
- · Reading: 0.001"
- · Continuous reading: 0 100
- Tolerance markers
- · AGD Group 2, 2-1/4" dia.
- · Lugback and carbide point

All in a shop-hardened case!

Order Number Description Dial Color 72-585-450-0 Chrome Flex Mag and X-Proof Indicator Set White 72-585-455-0 Chrome Flex Mag and X-Proof Indicator Set Black








Indicator & Mini Mag Set



Anyform Magnetic Base

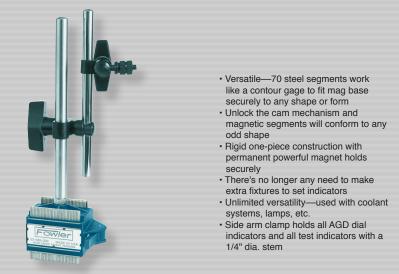

Order Number	Base Width	Base Height	Base Depth	Lbs. Pull
72-585-200-0	2-1/4"	2-1/8"	1-3/4"	40

TRA MAG A Versatile Universal & Mag Base Combo!



- Auto-reversing
- 0.080" diameter point

All complete in a shop-hardened case!

Order Number	Description
72-585-105-0	Xtra Mag only
72-585-100-0	Xtra Mag with Test Indicator

Dovetail mounting



INDI-XIII Electronic Indicators

Now available in 0.5"/12.5mm & 1"/25mm ranges!

- Direct Inch/Metric Conversion
- 2-1/4" dial face
- · Lugback and 3/8" stem mountings
- Resolution 0.0005"/0.01mm
- Tolerance indicators
- · Absolute/incremental reading
- · Floating zero
- · Carbide tipped point

Low Cost. **High Quality Multi-Function** Indicators

Carbide-tipped point!

Order Number 74-520-250-0 74-520-255-0

Description 1"/25mm Indi-X Blue Electronic Indicator 0.5"/12.5mm Indi-X Blue Electronic Indicator




Electronic Indicator

INCH • METRIC • FRACTION Direct Inch/Metric/Fraction Conversion Auto Off feature · 2-1/4" dial face · Lugback and 3/8" stem mountings Low Cost. ZERC Resolution 0.0005"/0.01mm/64ths ON/OFF Tolerance indicators High Quality, · Absolute/incremental reading **Multi-Function** Floating zero Indicators Carbide tipped point **Carbide-tipped point!** Order Number Description

74-520-260-0

1"/25mm/Fraction Indi-X Blue Electronic Indicator

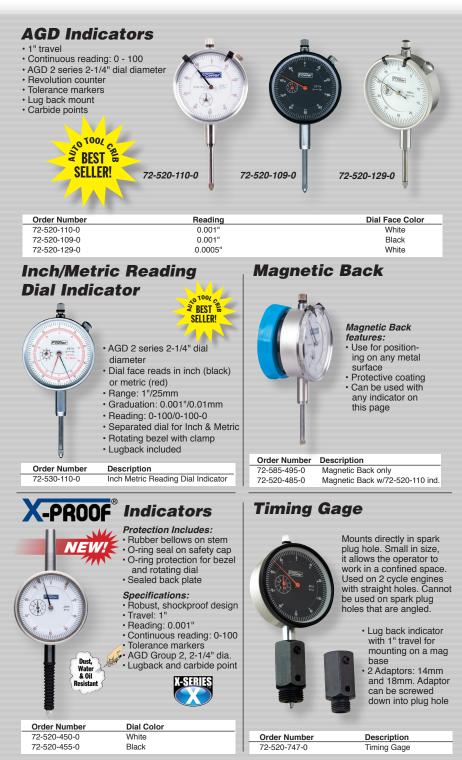

38



- Turn your dial or electronic indicator into a depth gage (may reduce range)
 4" length
- Fits indicators with 3/8" or 8mm mounting stem, adaptor bushing included
- Ground and lapped base

Order No. 72-125-004-0

Depth Base Attachment

Long Range Indicator Test Set

- · For direct measurements
- · Rotates for setting at any point
- · Includes mag base with post and dual diameter rod
- Includes indicator which features 1" range; 0.001" graduations; reading: 0 - 100; 2-1/4" dial diameter and includes rod connector and holding clamp
- Carbide contact point
- · Includes shop-hardened case



Order Number 72-520-707-0 Description Long Range Indicator Test Set

Magnetic Base & Dial Indicator Combo

- Includes 1" indicator and mag base, plus rods, swivel clamp and case
- The 2-1/4" diameter 0.001" indicator features: satin chrome finish, tolerance hands, lug back and revolution counter
- The 6" high mag base features a 1.5" x 1.5" x 1.75" 50 lb. pull base and a 4.5" long sidearm All exposed metal is finished in anodized black for corrosion resistance
- · Includes shop-hardened case

Order Number

72-522-101-0




Description Magnetic Base & Dial Indicator Combo



Cylinder & Bore Measurement

Extender 1.4" to 6" or 35 to 160mm Dial Bore Gage Set with Carbide Anvils

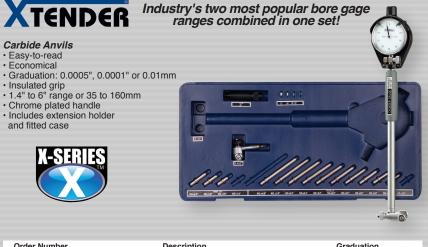

 Order Number
 Description
 Graduation

 72-646-500-0
 Inch X-Tender Bore Gage Set
 0.0001"

 72-646-400-0
 Inch X-Tender Bore Gage Set
 0.0005"

 72-646-220-0
 Metric X-Tender Bore Gage Set
 0.01mm

Extender-E Electronic 1.4" to 6" Dial Bore Gage Set

XTENDER Industry's two most popular bore gage ranges combined in one easy-to-use ELECTRONIC set!



Order Number 74-646-401-0 Description XTender-E Electronic Dial Bore Gage Set



Order Number	Description	Range
72-646-100-0	Dial Bore Gage Set	0.7 - 1.5"
72-646-300-0	Dial Bore Gage Set	2 - 6"

Bore Gage Setting Master Sets

Fowler's Bore Gage Setting Master Set is used for accurately setting any bore gage up to 6" in diameter to an accuracy of 0.0001"/0.003mm

Each Set includes:



Order Number 73-646-000-1 73-646-010-0 Description Bore Gage Setting Master Kit Metric Bore Gage Setting Master Kit





Order Number 72-646-600-0 Description X-tra Range 4" to 12" Bore Gage

2" to 6" Right Angle Dial Bore Gage

with Carbide Anvils

For measuring main bores, cam bores & other hard-to-reach areas directly!

Carbide Anvils

- Easy-to-read
- Economical
- Range: 2" to 6"
- Graduation: 0.0005"
- No passing through other bores to measure inboard journals
- 0.050" travel in 0.0005" increments
- Chrome plated handle
- · 3 spacers, 11 probes
- Insulated grip
- Includes extension holder and fitted wooden case



Order Number 72-646-250-0 Description 2" to 6" Right Angle Dial Bore Gage

Dial Cylinder Bore Gage



- Measure cylinder taper and out-ofroundness without removal of the piston
- Measure bore diameter to 8" depth
- Graduations: 0.001
- Range: 2.6" to 7"
- Includes gage, contact extensions and indicator

Order Number 72-646-200-0 Description Dial Cylinder Bore Gage

Inside Micrometers

- Each set consists of an inside micrometer head and a series of fully hardened and lapped extension rods of different lengths
- Anvil and spindle are hardened and precision ground with microlap finish on ends
- Spindle thread hardened, ground & lapped
- .001" Microfine graduations on satin chrome
- Positive locking nut on spindle
- Meets or exceeds Federal accuracy specs.
- Reference standard included with set
- Includes a wrench and a fitted case



Order Number	Description
72-243-026-1	2" - 6" Inside Micrometer
72-243-212-1	2" - 12" Inside Micrometer
72-243-220-1	2" - 20" Inside Micrometer

12" Telescoping Gage Set

Another great tool for easy and accurate measurements. Under spring tension, the plungers of the gage expand from the center to the size of the hole being measured and are then locked in place using the knurled knob. Final hole size is obtained by measuring over the contacts with a micrometer or vernier caliper.



- Contact points are constructed of hardened tool steel, precision ground
- Double action rigid handle with self-centering feature for quick checking of inside measurements
- Constant spring tension for uniform feel
- Covers a measuring range of 5/16" to 6" with measurable depths of 12"
- · Includes fitted vinyl case

Order Number 72-470-007-0

Description 12" Telescoping Gage Set



Telescoping Gages



Another great tool for easy and accurate measurements. Under spring tension, the plungers of the gage expand from the center to the size of the hole being measured and are then locked in place using the knurled knob. Final hole size is obtained by measuring over the contacts with a micrometer or vernier caliper.

- Double action rigid handle with self centering feature for quick checking of inside measurements
- Constant spring tension for uniform feel
- Contact point ends are hardened tool steel and precision ground on a radius of the smallest hole the gage will enter
- Covers a measuring range of 5/16" to 6" with measurable depths of 4" to 5"
- · Includes fitted vinyl case

Order Number	Description	Depth
72-470-004-0	4 piece 5/16" to 2-1/8"	4 to 5"
72-470-006-0	6 piece 5/16" to 6"	4 to 5"

Telescoping Gage Set with Titanium Coated contact points!

- Contact points are constructed of hardened tool steel, precision ground and titanium coated for accuracy and durability
- Double action rigid handle with self-centering feature for quick checking of inside measurements
- · Constant spring tension for uniform feel
- Covers a measuring range of 5/16" to 6" with measurable depths of 4" to 5"
- · Includes fitted vinyl case



Order Number 72-470-000-0 Description Telescoping Gage Set with Titanium coated contact points

Small Hole Gage Set



- · Knurled knob at the end of handle is used for size adjustment
- Hole size is obtained by measuring over the contact points
 with a micrometer
- The gaging surface is a full-round with a flat bottom
- This permits use in the smallest of shallow holes, slots and grooves, etc.
- · Gaging surface is fully hardened to ensure long tool life
- · Extra long for gaging deep and shallow slots and similar work
- The complete set of four gages covers a range of 0.125" - 0.500"
- Includes fitted vinyl case

 Order Number
 De

 72-472-104-0
 Sm

Description Small Hole Gage Set - Set of 4 gages Range 0.125" - 0.500"


TRA-VALUE Internal & External Electronic Caliper Gages



Prices and specifications are subject to change without notice

Spring Calipers & Dividers

- Ends fully rounded on Outside/Inside Spring Calipers and Spring Hermaphrodite Calipers
- Outside Spring Calipers meet Federal Specification Type II, Class I. Inside Spring Calipers meet Federal Specification Type I, Class I
- Quick, positive adjustment
- Spring Dividers meet Federal Specification Type A, Class 2 and supplied with a plastic point protector. Points fully hardened/tempered. High carbon steel legs heat treated
- · Adjustment screw centrally located; legs are well balanced with uniform tension
- Natural polished steel finish

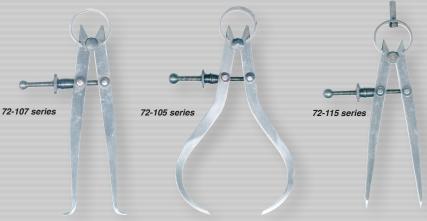

Order Number	Description
72-105-006-0	6" Outside Spring Caliper
72-106-006-0	6" Outside Spring Caliper with quick nut
72-107-006-0	6" Inside Spring Caliper
72-108-006-0	6" Inside Spring Caliper with quick nut
72-115-006-0	6" Spring Divider
72-116-006-0	6" Spring Divider with quick nut

Drill Gages

72-480-005-0	72-480-006-0	72-480-008-0	72-480-010-0	72-480-015-0	72-480-020-0

Order Number	Description
72-480-005-0	1/16"- 1/2" Jobber Drill-29 holes
72-480-006-0	1mm - 5.9mm Jobber Drill; 57 holes
72-480-008-0	1.5mm - 12.5mm Drill Gage; 30 holes
72-480-010-0	#1-#60 Number Drill; 60 holes
72-480-015-0	#61—#80 Number Drill; 20 holes
72-480-020-0	A-Z Letter Drill; 26 holes





Order Number	Description	Range	
72-482-028-0	28 Piece Transfer Punch Set	3/32" - 1/2"	
72-482-030-0	33 Piece Transfer Punch Set	1/2" - 1"	

XTRA-PUNCH Heavy Duty Transfer Punch Set

to use



- 1/2" 1" range in 1/64"
- 36 piece set, 3 master punches and 33 individually sized sleeves
- Each sleeve and punch is clearly laser etched with its size
- Simply select the sleeve for the size required, place it on one of the master punches for that range and it is ready to use
- Punches and sleeve ranges are color coded for easy pairing
- Heavy duty for larger applications
- Punch tips are hardened 48-55 HRC
- Master punches are 4-7/8" in length and sleeves are 1" in length
- 1/4 the weight of a conventional transfer punch set with this range (approximately 4.5 lbs.)
- · Supplied in a fitted, shop hardened case

Sizes ideal for heavy duty applications. Simply select the sleeve for the size required, place it on one of the master punches for that range and it is ready

Order Number	Description
72-482-040-0	36 Piece Transfer Punch Set



Bell Punch

- Easily locates and allows center punching of ends on round stock
- Hardened to 48-52 HRC
- Accurate to 0.0016"/0.04mm



Order Number 72-500-150-0 72-500-155-0 Description Bell Punch Replacement Punch

Center Punch Set

- · Housing finished in black nitrate
- · Chrome alloy steel; hardened both ends
- · Knurled finger grip for easy handling
- · All sizes marked for fast and easy use
- Point sizes 3/64", 5/64", 7/64", 9/64" and 11/64"
- · Includes fitted case



Order Number 72-500-015-0 Description Center Punch Set

Heavy Duty Automatic Center Punch

- Knurled steel handle
- · Moveable components made of hardened steel
- Point easily removed for sharpening
- Features adjustable compression for marking a variety of materials





Spark Free Brass Drive Punch Set

- Made of brass
- · Punch section centerless ground
- · Length is 4"
- · Hexagonal body style
- Used in spark-free environments
- Point sizes 1/16", 3/32", 1/8", 5/32", 3/16",
- 7/32", 1/4" and 5/16" • Includes fitted case



Order Number 72-500-068-0 Description 8 Drive Pin Punch Set

Extra Long Drive Pin Punch Set

- Black nitrate finished housing. Made of chrome alloy steel. Hardened on both ends.
- Knurled finger grip
- Length is 8"
- Point sizes: 1/8", 3/16", 1/4", 5/16" and 3/8"
- · Includes fitted case



Order Number 72-500-300-0 Description Extra Long Drive Pin Punch Set

Straight Edges

- Made of selected steels
- · Hardened for superior wear resistance
- · Matched to precision masters to insure precision
- Width and thickness have been carefully determined to provide optimum rigidity-to-weight ratios

Order Number	Length	Width	Straightness	Thick
72-480-050-0	18"	1.320"	0.0003"	0.150"
72-480-055-0	24"	1.675"	0.0003"	0.170"
72-480-060-0	36"	2.730"	0.0004"	0.225"



Combination Square & Components



Square Sets

Order Number	Description		
72-386-006-0	Square and Center head with 6"	' blade	
72-373-012-0	Square head with 12" blade		
72-370-012-0	Square, Protractor and Center H	lead with 12" blade	
Components			
Order Number	Blade Size	Graduation	
Blades—Inch Series:			
72-400-012-0	12"	1/64", 1/32", 1/16", 1/8"	
Blades—Metric Series:			
72-400-015-0	300mm	1mm, 0.5mm/32nds & 64ths	
Order Number	Description	Accepts Blade Size	
Heads:			
72-410-010-0	Square Head	12"	
72-415-010-0	Center Head 12"		
72-421-000-0	Reversible Protractor Head	12"	

Ez-Read Black Rules

- Hardened stainless steel.
- White easy-to-read microfine graduations against black non-glare finish.

72-307-006-0 (Front)

72-379-006-0 (Front)

Back Now available the 0.566 70 80 90 100 110 120 TWO MOST POPULAR					
5R: E/M:	GRADUATIONS 32nds, 64ths, 10ths, 10 .5mm, 1mm, 32nds, 64t	Oths	Elin.	A PARTY	
Order Number 72-307-006-0 72-379-006-0	Description Black EZ Read Rule Black EZ Read Rule	Size 6" 6"/150mm	Type Flexible Flexible	Graduation 5R E/M	

Flexible Steel Rules

ана на 1 ала и та 2 ала на 2

- Hardened stainless steel
- · Etched, non-glare, black finish
- 5R graduations: 32nds and 64ths, 10ths and 100ths
- 4R graduations: 8ths, 16ths, 32nds & 64ths
- · Flexible rules: 0.020" thick
- · Gold rules are titanium coated

FLEXIBLE STEEL RULES				
Order Number	Finish	Size	Reading	
72-295-006-0	Satin Chrome	6"	4R	
72-297-006-0	Black	6"	4R	
72-299-006-0	Golden	6"	4R	
72-295-012-0	Satin Chrome	12"	4R	
72-297-012-0	Black	12"	4R	
72-299-012-0	Golden	12"	4R	
72-300-006-0	Satin Chrome	6"	5R	
72-307-006-0	Black	6"	5R	
72-309-006-0	Golden	6"	5R	
72-300-012-0	Satin Chrome	12"	5R	
72-307-012-0	Black	12"	5R	
72-309-012-0	Golden	12"	5R	

6"/150mm Pocket Steel Rule





- Rounded edge prevents damage to shirt pocket
- Inch graduations are in 64ths
- · Metric scale is in 1mm increments

• Rule	width: 0.470"
Rule	thickness: 0.021"

Order Number	Description	
72-380-100-0	6"/150mm Pocket Steel Rule	

Metal Etching Pen

A "must" for any tool room and machine shop for general marking purposes, Fowler's metal etching pen is used on copper, copper alloy, stainless steel, hardened steel tools and castings, etc. Use it to initial personal tools. Its low-cost, disposable design offers limitless applications.

	ETCHING MARKER Fowler Tint	
Order Number	Description	
72-730-005-0	Disposable Felt Tip Metal Etching Pen. Overall length is 6-1/4"	
52		

2 in 1 Scriber & Center Punch



 Order Number
 Description
 Overall Length

 72-500-050-0
 Carbide Super Scriber
 6.5"

 72-500-055-0
 Carbide Refills

1


I inhtweight · Betractable carbide tin · Eluted grin · Blue anodized aluminum body · Pocket clin

·Lightweight		• Fluted grip • Blue alloui	zeu aluminum bouy	· Focket clip
Order Number		Description	Ove	erall Length
72-500-000-0		Pocket Carbide Scriber		6.0"
72-515-046-0		Carbide Refills		
				_
 Heavy duty 	· Replaceable carbide t	ip • Knurled grip • F	ocket clip • Mag	netic end cap
Order Number		Description		Overall Length
72-500-080-0		Replaceable Tip Carbide with	magnetic end cap	5.75"
72-500-085-0		Carbide Refills		
	A DESCRIPTION OF THE DESCRIPTION			
				5
 Heavy duty 	 Fixed carbide tip 	Pencil-like de	sign • Pocke	et clip
Order Number		Description	Ove	erall Length
72-500-090-0		Fixed Tip Scriber		6.0"

Swiss Pattern File Set

Swiss Pattern Files are economically priced and each set includes a fitted case and 12 of the finest quality files in the most popular shapes.

Swiss Pattern Files are fine precision cutting tools used by tool and die makers, model makers, delicate instrument and part finishers for a variety of filing jobs. Made to closer tolerances than American pattern files, they are primarily finishing tools for removing burrs, trueing narrow grooves, notches, keyways, cleaning corners, smoothing small parts and similar jobs.



Order Number	Description	Length	Cut No.
75-130-060-0	12 pc. Swiss Pattern File Set	6"	#0
75-130-062-0	12 pc. Swiss Pattern File Set	6"	#2

Diamond File & Deburring Set



- with 2-1/2" length of cut
- 2 triangular scraper/deburring tools (single and double ended)
- Fitted storage case

Order Number	Description
72-483-666-0	Diamond File & Deburring Set



Disposable Deburring Tool with Pocket Clip



- "Quick-change" thumb operated button for instant removal, insertion and locking of new blades
- Supplied with three blades: 1) for steel and aluminum, 2) for brass and cast iron, 3) for straight edges on all types of metals
- · Hollow handle with a removable end cap for storage of blades
- Unique rounded head blades for safe deburring of drilled and machined holes, end milled areas, tubing, backside of holes and an almost unlimited amount of uses
- Curved blades swivel freely to automatically follow shapes, contours and holes
- Molded to comfortably fit the user's hand without slippage or fatigue



Order Number 72-483-003-0 Description

Adjustable Scraper & Deburring Cutter with three blades

Rapid Burr

- "Quick-change" thumb operated button for instant removal, insertion and locking of new blades
- · Supplied with a blade for steel and aluminum
- Unique rounded head blade for safe deburring of drilled and machined holes, end milled areas, tubing, backside of holes and an almost unlimited amount of uses
- Curved blades swivel freely to automatically follow shapes, contours and holes.
- · Adapts to all S-blades
- Molded to comfortably fit the user's hand without slippage or fatigue

for steel & aluminum

Order Number 72-483-025-0 Description Rapid Burr

4 Piece Deburring Cutter Set

4pc Deburring Cutter Set features four separate color coded cutters. Each color indicates the material that the cutter is intended for.



Order Number

72-483-777-0 For replacement blades see Fowler's Main Catalog Description 4 pc. Deburring Cutter Set

Universal Deburring, Cleaning & Countersink Set A complete kit for the Auto Repair Professional!



Order Number 72-483-888-0 Description Universal Deburring, Cleaning & Countersink Set



3 Piece Deburring Cutter Set

- Most economical
- · 3 deburring tools
- · Blades are replaceable
- 3 different blades from heavy duty to extra fine

for brass & cast iron

for steel & aluminum

for plastic

Order Number 72-483-555-0 Description 3 pc. Deburring Cutter Set

For replacement blades see Fowler's Main Catalog

Universal Magnetic Mini Flex Base with LED Flashlight



This product is ideal for focused applications in Industrial and Automotive!

- Zoomable 150 lumens Ultra-bright flashlight
- with 3 modes; bright, dim and flashing
- Powerful, low-profile magnetic base
- Slim, articulating flex bar allows easy and accurate positioning
- Quick release mounting bracket clamp
- Batteries included



Description Universal Magnetic Mini Flex Base with light

Deep Hole Light

- Deep Hole Light permits viewing in deep holes, around corners, under grooves, etc.
- Includes battery case for 2 penlight batteries and a battery case for one battery for use where space is limited; batteries not included
- Features a positive switch. Curved and straight light conveying devices place intense illumination at their ends directly on the bottom of the hole being viewed. A small mirror permits viewing in a manner similar to a dentist examining teeth.
- Includes plastic case



Order Number 72-270-000-0 Description Deep Hole Light

Screwdriver Set





- This precision Screwdriver and Tool Set is ideal for miniature work
- Features knurled and chromed swiveling handles
- Screwdriver and Tool Set contains 9 screwdrivers, 1 tapered point scratch awl and 1 magnetic pick-up tool
- Screwdriver size range: #00, #0, #1, 1/32", 3/64" 1/16", 5/64", 3/32" and 1/8"

Order Number 72-490-003-0



X-BLOX[®] V-Block Set

2 each @:

- Dimensions: 1-1/2" L x 1-1/4" W x 1-1/4" H.
- · Work capacity: Approximately 1"
- 2 each @:
- Dimensions: 2" L x 1-1/2" W x 1-1/2" H.
- · Work capacity: 1-1/2"

All feature:

- Surfaces are square and parallel within 0.0005"
- V-grooves are square and parallel with all surfaces within 0.0005"
- Corresponding dimensions for each pair are alike within 0.0005"
- · All enclosed in shop-hardened case



Order Nu	mber
72-475-50	0-0

Description X-Blox V-Block Set

Rectangular Head Protractor

- · Measures angles from 0-180 degrees.
- · Used to transfer angles and to set bevels.
- · 6" arm with knurled thumb lock nut.
- · Made of chrome steel with satin finish.
- Measures 3-5/16" x 2". Rectangular head provides four working edges. Blade secured firmly at any angle by a lock joint and knurled nut.



Order Number 72-450-010-0 Description Rectangular Head Protractor



Valve Seat Runout Gages

Small, compact dial gages designed to measure valve seat runout on most gasoline engines including automobiles, motorcycles, outboard and inboard engines, trucks, snowmobiles, etc. Valve seat runout tolerances for engines are within ±.001".

Gage should be positioned on pilot, adjustable probe should be set on the valve seat and the gage is then turned 360°. A complete range of adaptors are available for different pilots. Gage contains jewelled bearings.

- Range 0.200"
- Graduation 0.001
- · Reading 0 50 0



Order Number	Description	Adaptor Size	For Pilots*
72-644-000-0	Valve Seat Runout Gage	3/8"	Black & Decker, K.O.Lee, Neway, Olcott
72-644-200-0	Valve Seat Runout Gage	3/8" + .010"	Sioux

01001

BEST SFI I FR



Order Number 72-492-350-0

Description Tap-X Cam-Locking Tap Wrench



High Precision

HEADQUARTERS

66 Rowe Street • Newton • Massachusetts 02466 (800) 788-2353 • (617) 332-4137 fax www.fowlerprecision.com • sales@fowlerprecision.com

DISTRIBUTION CENTER & SHOWROOM 28010 Industry Drive

28010 Industry Drive Valencia, California 91355 (415) 633-5354



www.fowlerprecision.com